


PLUS POINTS

- ♥ Enables effective ventilation and water drainage, in accordance with DTU 51.4.
- ♥ Extends the lifespan of the decking and its structure
- ♥ As easy to install as a Silvadec board (identical dimensions and fastened with screws or clips)

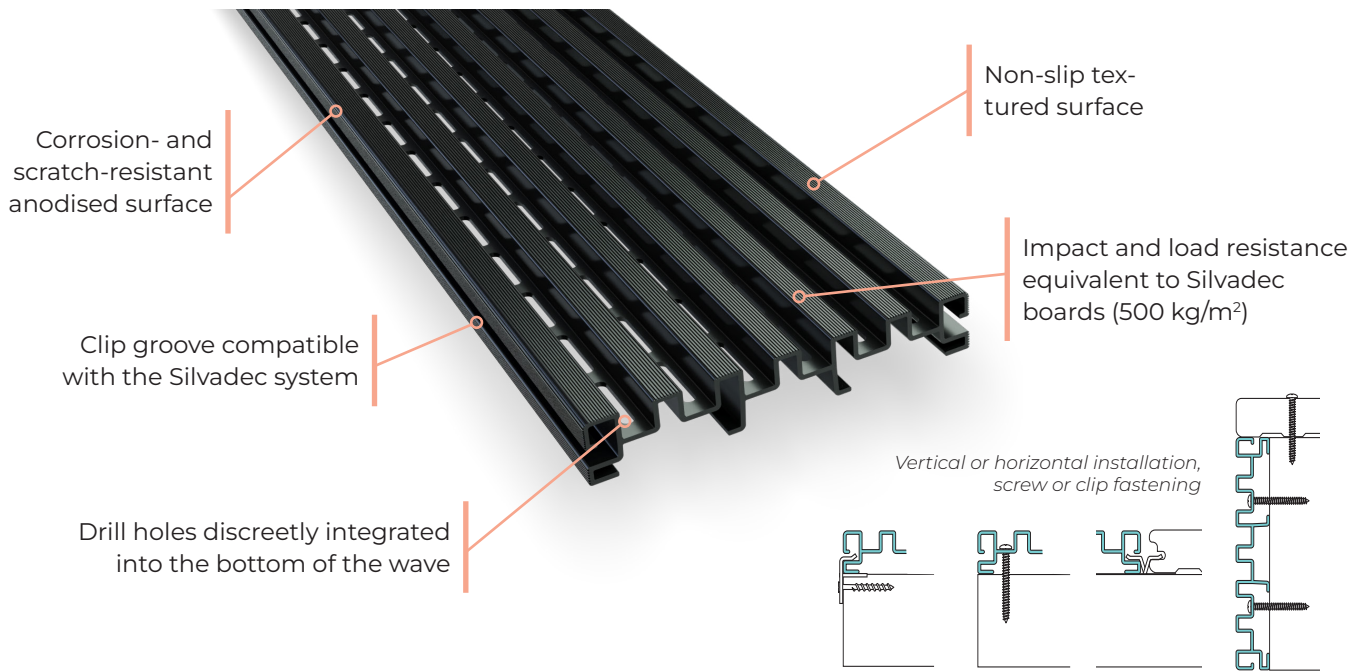

TECHNICAL DETAILS

Dimensions	138 x 23 x 1995 mm	Drill holes: 4.5 x 26.5 mm	Ventilated surface: 200 cm ² /ml
Material	6063-T6 anodised aluminium		
Finishes	Grey anodised (E0296) ● / Matt black anodised (E0304) ●		
Installation instructions	400 mm centre-to-centre distance between joists. Use stainless steel screws with a round head and a maximum diameter of 4.5 mm. 5 mm expansion at the end of the board.		
Logistics	Weight per metre 1.5 kg/m. Bundled in twos. Palette of 64 boards, i.e. 128 m.		
Tolerances	Width and thickness: ± 1 mm; Length: ± 5 mm; Weight: ± 5%		

